

SHER2M Ultra Low Headroom
 Artikelnummer SHER2M Ultra Low Headroom



Omschrijving

Standaard

Opties




Type

Specifications

Capacity (t)	Product Code	Hoist Body	Stand- ard Lift (m)	Push Button Cord L (m)	ER2				Trolley				Test Load (t)	Net Weight (kg)		
					Lifting Motor		Load Chain	Travelling Motor		Flange Width B (mm)	Motorized Trolley	Geared Trolley		Plain Trolley		
					Output (kW)	Rating (NED)		Lifting Speed (m/min)	Diameter, Chain (mm) * Falls						Output (kW)	Rating (NED)
250kg	SHER2M003S	B			0.56		0.2	4.3 x 1				313kg	78	61	56	
500kg	SHER2M005L	C			0.9	60	3.8	6 x 1				75 to 125	625kg	84	67	62
	SHER2M005S						7.3									
1	SHER2M010L	D	2.5		0.9	60	3.5	7.7 x 1				100 to 125	1.25	104	87	82
	SHER2M010S						7.1									
1.6	SHER2M016S	E	3		1.8	60	4.8	10.2 x 1	0.4	40	20 (10)	2	158	139	134	
2	SHER2M020L	F			1.8	60	3.7	11.2 x 1				125 to 150	2.5	162	143	138
	SHER2M020S						5.7									
3.2	SHER2M032S	E	2.8	3.5	3.5	60	3.5	10.2 x 2				4	241	222	217	

5	SHER2M050S	F			2.9	11.2 x 2	0.75		150 to 175	6.25	322	307	300
---	------------	---	--	--	-----	----------	------	--	------------	------	-----	-----	-----

Note: The bracketed figures in Traversing Speed are low speed. This product is designed for straight beams. Specify a beam width at the time of quotation or order. The following information will be provided upon your request: 1) availability of curve beams 2) availability of a flange width exceeding the maximum.

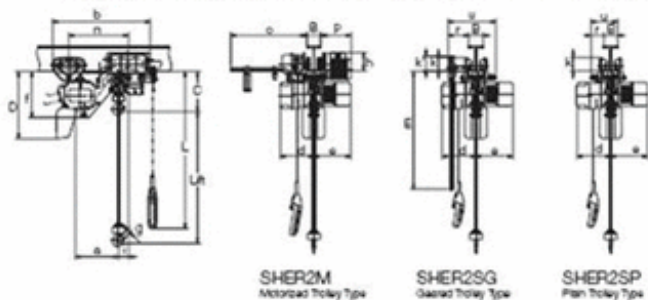

Dimensions (mm)

Capacity (t)	Product Code	Headroom C	D	E	a	b	d	e	f	g	h	i	j	k	k'	n	o	p	r	u
250kg	SHER2M003S	265	430		260	(556)(110)	219	259	325			68				380				
500kg	SHER2M005L	285	525		310	(706)(66)	242	271	370	27	130	70	18	95	107	430	515	220	152(56)	145(248)
	SHER2M005S																			
1	SHER2M010L	345	550	3700	330	(734)(94)	291	298	405	31		77				458				
	SHER2M010S																			
1.6	SHER2M016S	435	640		389	(826)(03)	306	336	487	34						523				
2	SHER2M020L	475	840		423	(848)(23)	337	390	527	39	125	79	29	112	109	543	520	225	154(68)	145(200)
	SHER2M020S																			
3.2	SHER2M032S	610	830		435	(882)(84)	347	356	487	44	131	45	24	134	115	560	521	226	157(78)	148(220)
5	SHER2M050S	670	860	4200	475	(957)(82)	337	390	542	47	145	66	31	144	131	657	528	281	156(53)	141(247)

Note: The bracketed figures in Size "b" are for geared or plain trolley. The bracketed figures in Size "i" or "u" are for plain trolley. Size "o" is for a lift of 4m. This information which varies depending on the lift is provided upon your request.