

TWER2M Twin Hook
 Artikelnummer TWER2M Twin Hook



Omschrijving

Standaard

Opties




Type

Specifications

Capacity (t)	Product Code	ER2						Trolley			Test Load (t)		
		Hoist Body	Standard Lift (t)	Push Button Cord L (m)	Lifting Motor		Lifting Speed (m/min)	Load Chain	Traversing Motor			Range Width (mm)	
					Output (kW)	Rating (%IEC)			Output (kW)	Rating (%IEC)			
125kg + 125kg	TWER2M003S	C			0.56	60	9.2	6 x 2	0.4	40	20 (10)	58 to 153	156kg x 2
250kg + 250kg	TWER2M005L				0.9		3.8						313kg x 2
	TWER2M005S				0.9		7.3						625kg x 2
500kg + 500kg	TWER2M010L	D	3	2.5	1.8	3.5	7.7 x 2	40	20 (10)	82 to 178	1.25 x 2		
	TWER2M010S				1.8	7.1	625kg x 2						
1 + 1	TWER2M020L	E			3.5	3.7	10.2 x 2	0.75		100 to 178	2 x 2		
	TWER2M020S				3.5	7.0	3.13 x 2						
1.6 + 1.6	TWER2M032S	F			2.8	2.9	11.2 x 4	0.75		100 to 178	3.13 x 2		
2.5 + 2.5	TWER2M050S				2.8	2.9	11.2 x 4				3.13 x 2		

Note: The bracketed figures in Traversing Speed are low speed. This product is designed for straight beams. Specify a beam width at the time of quotation or order.
 The following information will be provided upon your request: 1) precise weight depending on length of the hook span 2) availability of curve beams 3) availability of a lift exceeding the maximum (3m)

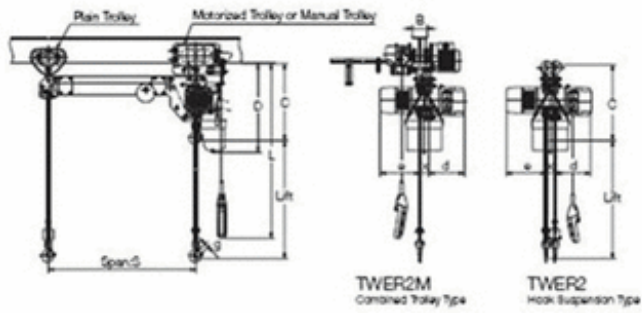

Dimensions (mm)

Capacity (t)	Product Code	Headroom C		D	B	d	e	g	x	
		With Trolley	Hook							
125kg + 125kg	TWER2M003S						271			
250kg + 250kg	TWER2M005L	535	525	620	Min. 510	242	271	27	60	
	TWER2M005S						268			
500kg + 500kg	TWER2M010L	615	620	710	Min. 530	291	298	31	71	
	TWER2M010S						307			
1 + 1	TWER2M020L	800	830	700	Min. 650	308	338	39	81	
	TWER2M020S						347			
1.6 + 1.6	TWER2M032S	970	905	920			356	44		
2.5 + 2.5	TWER2M050S	1020	1025	900			337	399	47	85

Note: Maximum hook span (S) is 4m. Longer span is also available so contact the nearest KITO dealer.